

Epson Series UV Roll to Roll Printer

3.2米UV卷材打印机 — 高性价比之选


Dual Heads 双喷头

4/6-Color 4/6色写真

Variable Dot 可变墨滴

White Optional 白色可选

2 Sizes & 2 Print-head Configurations Available
提供两种尺寸和两种喷头配置

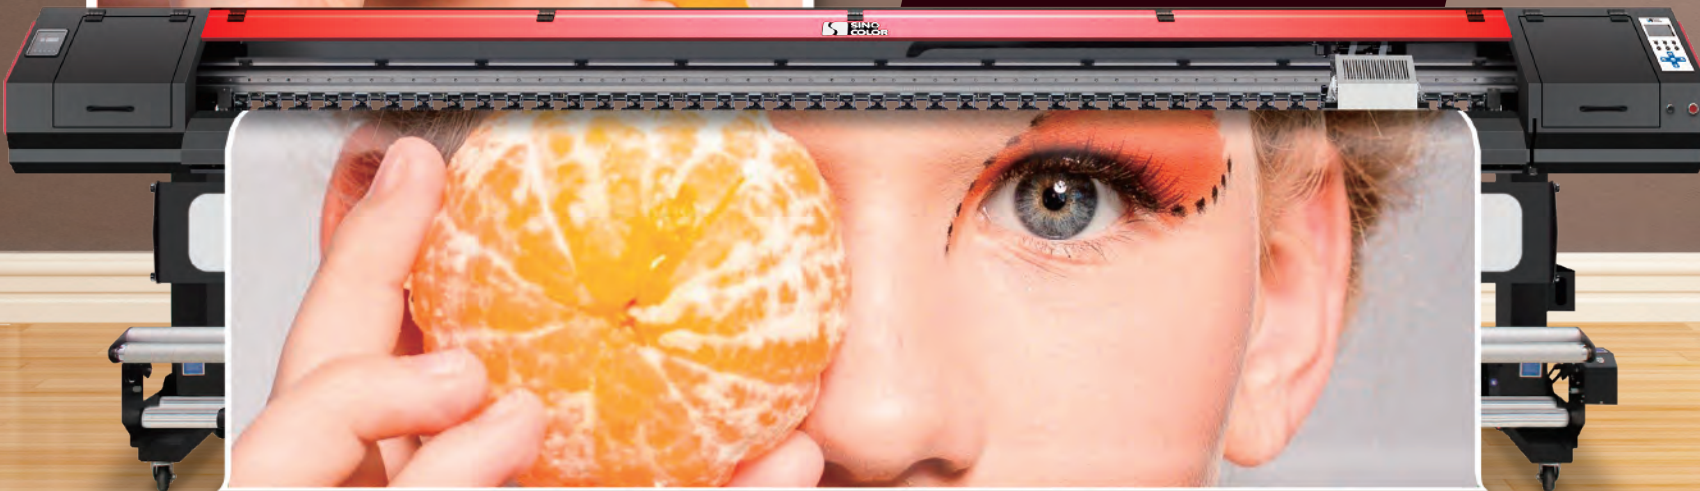

● Features 特点



Different Printhead Available
Equipped Epson F1080 or DX5 or i3200 Head. 4 colors and 6 colors models are optional.

爱普生DX5和F1080,i3200 三种喷头可选
根据你的需求来选择4色或者6色输出



Water Cooling UV-LED Lamp
It is one of the world's top UV-LED, long lifespan, low heat, and instant on-off

水冷UV-LED灯
装备世界顶级的UV-LED，寿命长，发热低，即时开关



Variable Dot Print Technology
Permitting the printer to provide smooth gradations, exceptional solid colors and optimum image quality in all print modes
可变墨滴技术
使打印画面的颜色过渡更加自然，实现高质量成像



Anti-collision Function
Anti-collision system is equipped to protect the printhead and carriage all the time

防撞功能
标配防撞装置，支持中断处续打



Advanced Media Handling
With SinoColor advanced movement control system, each pass is uniform allowing for more sellable output in less time
强大的收放布系统
儒彩先进的收放布控制系统，提高生产效率

- ★ High-density UV curable ink produces rich, vibrant colors on coated or uncoated media
高密度UV固化墨水在涂层或非涂层材料上实现丰富而鲜明的色彩
- ★ Durable, scratch-resistant and virtually odorless, Up to three years outdoor durability without lamination
画面持久，耐刮擦，无异味，不覆膜长达三年的户外耐候性
- ★ Branded parts are used for high attrition area. Greatly increased the lifetime and stability of the machine. For example, Hiwin guide rail, German Igus drag chain, Italian Megadyne belt.
高损耗处皆使用高等级配件，极大提升设备使用寿命和稳定性



● Specification 参数

Model No.	型号	UV-1260	UV-1260E
Printing Head	打印喷头	2 × Epson DX5	2 × Epson F1080
Resolution	打印精度	1440 dpi MAX	
Media 耗材	Width 耗材宽度	3200 mm MAX	
	Type 耗材种类	Canvas, Garment, Leather, PET Film, Reflective Film, Soft Ceiling Film & More Flexible Material Etc. 天花软膜、灯布、车贴、服装、皮革、PET膜、反光膜以及其他众多卷材	
Speed 速度	Draft 草图模式	34 m ² /h	36 m ² /h
	Standard 标准模式	24 m ² /h	26 m ² /h
	Quality 精细模式	18 m ² /h	20 m ² /h
Ink 墨水	Type 墨水类型	UV Ink	
	Color 墨水颜色	CMYK / CMYK + W	CMYK Lc Lm / CMYK Lc Lm + W
	Curing 墨水固化	High Quality Whater Cooling UV-LED Lamp 水冷UV-LED灯	
Cleaning	清洗系统	Automatic Cleaning, Anti-Clogging Flash Function & Capping System 自动清洗、闪喷、封喷头	
Feed & TakeUp	收放布	Automatic Media Feeding (Standard) & Take up System (Optional) 自动收放布	
Rip Software	操作软件	Main Top (Standard)/ PhotoPrint (Optional)	
Connector	连接方式	USB 3.0	
Power	电力消耗	AC 110V / 220V ± 5%, 16A, 50/60Hz ± 1, 2000W MAX	
Size 尺寸	Machine 机器尺寸	L4360 x W800 x H1270 mm	
	Packing 包装尺寸	L4610 x W1000 x H740 mm	
Weight 重量	Machine 机器重量	480 KG	
	Packing 机器重量	640 KG	

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。